

# DENON AVR control protocol

Ver.7.4.0

Application model : AVR-2112CI/AVR-1912

Application terminal: RS-232C

Ethernet

## Connector specification

### . RS-232C

Connector type: DB-9pin female type, slave straight connection (DCE type)

( 1pin : GND , 2pin : TxD , 3pin : RxD , 5pin : Common(GND) , 4,6,7,8,9pin : NC )

Communication format:

Synchronous system : Tone step synchronization

Communication system : A half duplex

Communication speed : 9600bps

Character length : 8 bits

Parity control : None

Start bit : 1 bit

Stop bit : 1 bit

Communication procedure : Non procedural


Communication data length : 135 bytes (maximum)

Version	Date	Contents	Page
7.5.0	15.Apr.'11	Original	


. **Ethernet**

Connector type : RJ-45(10BASE-T/100BASE-TX)

*Example*

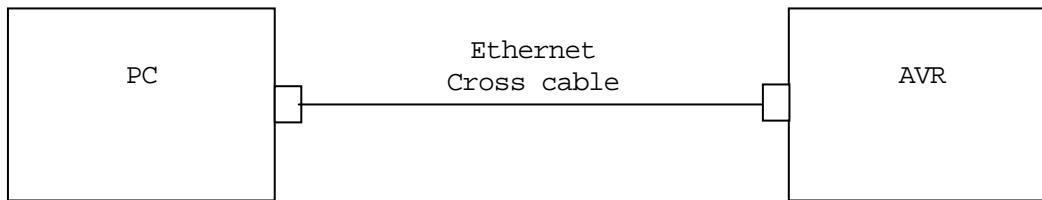

*Example*

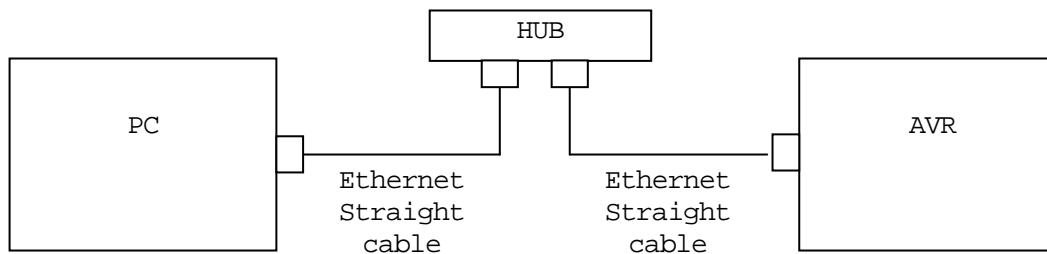

Communication format :

Communication system	: A half duplex
Communication speed	: 10Mbps/100Mbps
Communication port	: TCP port 23 (telnet)
Communication data length	: 135bytes (maximum)

## **NETWORK SETUP of AVR-2112CI/AVR-1912**

### **>Procedure of Network Setup mode.**

- (1)Press MENU button, then Menu appears on FL-display(and GUI)
- (2)Select "Manual Setup > Network Setup > Network Connecting > Detail" .
- (3)Set parameters described below.

<DHCP>        "ON"---Use this setting when DHCP server is on the local network.  
                "OFF"---Use this setting when DHCP server is not on the local network.

<IP Address> When <DHCP> sets "OFF", please set IP address.  
                When <DHCP> sets "ON", you can confirm the IP address that is set by server.

<Subnet Mask> When <DHCP> sets "OFF", please set Subnet Mask.  
                When <DHCP> sets "ON", you can confirm the Subnet Mask that is set by server.

<Gateway>      Set the address of Gateway when Gateway is on the local network.  
                Do not set this parameter when Gateway is not on the local network.

<Primary DNS> Do not set this parameter.

<Second DNS> Do not set this parameter.

<Proxy>        Set this parameter "OFF".

### **<Network Option: Network Standby Mode>**

- (1)Press MENU button, then Menu appears on FL-display (and GUI)
  - (2)Select "Manual Setup > Network Setup > Other > Network Standby"
  - (3)Set parameters described below.
- "ON"---Use this setting when using the AVR-2112CI/AVR-1912 Connected in a network.  
"OFF"--- Use this setting when not using the AVR-2112CI/AVR-1912 connected in a network.  
                This setting is reducing the power consumption in the standby mode.

## Protocol specification

The following three data forms are defined.

- COMMAND** : The message sent to a system(AVR) from a controller(Touch Panel etc.)  
A command to a system is given from a controller.
- EVENT** : The message sent to a controller (Touch Panel etc.) from a system (AVR)  
The result is sent, when a system is operated directly and a state changes.  
\*The form of **EVENT** presupposes that it is the same as that of **COMMAND**.  
\*\*Refer to the following table for the contents of **COMMAND** and **EVENT**.
- RESPONSE** : The message sent to a controller (Touch Panel etc.) from a system (AVR)  
if the 'request command' (**COMMAND**+?+CR(0x0D)) has came from a controller.  
The **RESPONSE** should be sent within 200ms of receiving the **COMMAND**.  
\*The form of **RESPONSE** presupposes that it is the same as that of **EVENT**.

**Basic specification:** The command by ASCII CODE, parameter expression

\*ASCII CODE which can be used is from 0x20 to 0x7F: the alphabet and the number of 0-9, and space (0x20), some signs,  
AND carriage return (0x0D) --- It is used only as a pause sign.

**Command structure:** COMMAND + PARAMETER + CR (0x0D)

COMMAND: ASCII CODE of 2 characters

- Ex.        SI    : Select Input source  
              MS    : surround Mode Setting  
              MV    : Master Volume setting  
              PW    : system PoWer setting

PARAMETER : ASCII CODE ( up to 25 characters)

- ex.        DVD : function name

SUPER STADIUM : surround mode name

\*Special Parameter--- ? : for request command

**The example of a command** \* <CR> is the meaning of 0x0D.

SIDVD<CR> : Select Input source DVD  
MSSTEREO<CR> : surround Mode Set to STEREO  
MVUP<CR> : Master Volume UP  
PWON<CR> : system PoWer ON  
PWSTANDBY<CR> : system PoWer STANDBY  
SI?<CR> : Request command for now playing input source >> Return **RESPONSE** 'SI\*\*\*<CR>'

## Others

- A) **COMMAND** is receivable also during transmission of **EVENT**.
- B) Since CHANNEL VOLUME changes simultaneously when the SURROUND MODE changes, the value of the channel volume of all channels returns as **EVENT**.
- C) CHANNEL VOLUME returns the data of ALL channels by the present SURROUND MODE also including an intact channel. In this case, the data of an intact channel is set to "50".
- D) Since SURROUND MODE changes simultaneously when the INPUT source changes, the SURROUND MODE (and also the value of the channel volume of all channels , It described in B ) returns as **EVENT**.
- E) When SURROUND MODE is the same in between INPUT source change before and after, **EVENT** of SURROUND MODE and CHANNEL VOLUME does NOT return.
- F) Although **EVENT** of SURROUND MODE returns when the present SURROUND MODE is set up again, CHANNEL VOLUME does NOT return.
- G) When SURROUND MODE is changed, before returning SURROUND MODE after change as **EVENT**, the present SURROUND MODE is returned.
- H) The **RESPONSE** should be sent as opposed to the request command by all the commands with which an **EVENT** exists , not need to the another request commands(ex. SV command).
- I) The **PARAMETER** (with **COMMAND** and **RESPONSE**, **EVENT**) of minimum level of MASTER VOLUME defines "99".
- J) If the MASTER VOLUME & CHANNEL VOLUME set with 0.5dB step, the **PARAMETER** (with **COMMAND** and **RESPONSE**, **EVENT**) defines three ASCII characters as bellows.

Ex.   MASTER VOLUME = +1.0dB :   MV81<CR>  
              +0.5dB :   MV805<CR>  
              0dB :   MV80<CR>  
              -0.5dB :   MV795<CR>  
              -1.0dB :   MV79<CR>  
                      |                |  
              -79.5dB :   MV005<CR>  
              -80.0dB :   MV00<CR>  
              **-80.5dB :**   **MV995<CR>**  
              --- :   MV99<CR>

\* At the \*\*.0dB step, only uses two ASCII characters as **PARAMETER**, same as usual.

- K) 1 seconds later, please transmit the next **COMMAND** after transmitting a power on **COMMAND** (PWON) .

## COMMAND and PARAMETER list

COMMAND	PARAMETER	function	example
PW	ON	POWER ON/STANDBY change	PWON<CR>
	STANDBY		PWSTANDBY<CR>
	?		PW?<CR>
MV	UP	MASTER VOLUME UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 80=0dB, 99=---(MIN) <b>995=-80.5dB</b>	MVUP<CR>
	DOWN		MVDOWN<CR>
	**		MV80<CR>
	?		MV?<CR>
CV	FL UP	CHANNEL VOLUME UP/DOWN , direct change to **dB ---FRONT Lch **:38 to 62 by ASCII , 50=0dB	CVFL UP<CR>
	FL DOWN		CVFL DOWN<CR>
	FL **		CVFL 50<CR>
	FR UP		CVFR UP<CR>
	FR DOWN		CVFR DOWN<CR>
	FR **		CVFR 50<CR>
	C UP		CVC UP<CR>
	C DOWN		CVC DOWN<CR>
	C **		CVC 50<CR>
	SW UP		CVSW UP<CR>
	SW DOWN		CVSW DOWN<CR>
	SW **		CVSW 50<CR>
	SL UP		CVSL UP<CR>
	SL DOWN		CVSL DOWN<CR>
	SL **		CVSL 50<CR>
	SR UP		CVSR UP<CR>
	SR DOWN		CVSR DOWN<CR>
	SR **		CVSR 50<CR>
	SBL UP		CVSBL UP<CR>
	SBL DOWN		CVSBL DOWN<CR>
	SBL **		CVSBL 50<CR>
	SBR UP		CVSBR UP<CR>
	SBR DOWN		CVSBR DOWN<CR>
	SBR **		CVSBR 50<CR>

MV, CV **COMMAND** : "\*" parameter uses two or three ASCII characters. (see page6 J section)

COMMAND	PARAMETER	function	example
CV	SB UP	---SURROUND BACKch (SBch 1SP) **:38 to 62 by ASCII , 50=0dB ---FRONT HEIGHT Lch **:38 to 62 by ASCII , 50=0dB ---FRONT HEIGHT Rch **:38 to 62 by ASCII , 50=0dB Return CV Status	CVSB UP<CR>
	SB DOWN		CVSB DOWN<CR>
	SB **		CVSB 50<CR>
	FHL UP		CVFHL UP<CR>
	FHL DOWN		CVFHL DOWN<CR>
	FHL **		CVFHL 50<CR>
	FHR UP		CVFHR UP<CR>
	FHR DOWN		CVFHR DOWN<CR>
	FHR **		CVFHR 50<CR>
	?		CV?<CR>
MU	ON	OUTPUT MUTE ON/OFF change	MUON<CR>
	OFF	MUOFF<CR>	
	?	Return MU Status	MU?<CR>
SI	CD	Select INPUT source Select iPod (dock or USB) and PLAY	SICD<CR>
	TUNER		SITUNER<CR>
	DVD		SIDVD<CR>
	BD		SIBD<CR>
	TV		SITV<CR>
	SAT/CBL		SISAT/CBL<CR>
	GAME		SIGAME<CR>
	<b>GAME2</b>		<b>SIGAME2&lt;CR&gt;</b>
	V.AUX		SIV.AUX<CR>
	DOCK		SIDOCK<CR>
	IPOD		SIIPOD<CR>

CV **COMMAND** : "\*" parameter uses two or three ASCII characters. (see page6 J section)

COMMAND	PARAMETER	function	example
SI	NET/USB	(North America model Only) (North America & Europe model Only) (North America model Only) (Europe model Only)	SINET/USB<CR>
	RHAPSODY		SIRHAPSODY<CR>
	NAPSTER		SINAPSTER<CR>
	PANDORA		SIPANDORA<CR>
	LASTFM		SILASTFM<CR>
	FLICKR		SIFLICKR<CR>
	FAVORITES		SIFAVORITES<CR>
	IRADIO		SIIRADIO<CR>
	SERVER		SISERVER<CR>
	USB/IPOD	Select USB or iPod Direct	SIUSB/IPOD<CR>
	USB	Select INPUT source NET/USB and USB Start Playback	SIUSB<CR>
	IPD	Select INPUT source NET/USB and iPod Direct Start Playback	SIIPD<CR>
	IRP	Select INPUT source NET/USB and Internet Radio Start Playback	SIIRP<CR>
	FVP	Select INPUT source NET/USB and Favorites Start Playback	SIFVP<CR>
	?	Return SI Status	SI?<CR>
ZM	ON	MAIN ZONE ON/OFF change	ZMON<CR>
	OFF		ZMOFF<CR>
	?		ZM?<CR>

COMMAND	PARAMETER	function	example
SD	AUTO	set AUTO mode (Priority:HDMI>>DIGITAL>>ANALOG)	SDAUTO<CR>
	HDMI	set force HDMI INPUT mode	SDHDMI<CR>
	DIGITAL	set force DIGITAL INPUT (Optical,Coaxial)mode	SDDIGITAL<CR>
	ANALOG	set force ANALOG INPUT mode	SDANALOG<CR>
	?	Return SD Status	SD?<CR>
DC	AUTO	set DIGITAL INPUT AUTO mode	DCAUTO<CR>
	PCM	set DIGITAL INPUT force PCM mode	DCPCM<CR>
	DTS	set DIGITAL INPUT force DTS mode	DCDTS<CR>
	?	Return DC Status	DC?<CR>
SV	DVD	VIDEO SELECT mode set , and select source	SVDVD<CR>
	BD		SVBD<CR>
	TV		SVTV<CR>
	SAT/CBL		SVSAT/CBL<CR>
	GAME		SVGAME<CR>
	<b>GAME2</b>		<b>SVGAME2&lt;CR&gt;</b>
	V.AUX		SVV.AUX<CR>
	DOCK		SVDOCK<CR>
	SOURCE	VIDEO SELECT mode cancel	SVSOURCE<CR>
	?	Return SV Status	SV?<CR>
SLP	OFF	MAIN ZONE SLEEP TIMER setting	SLPOFF<CR>
	***	***:001 to 120 by ASCII , 010=10min	SLP120<CR>
	?	Return SLP Status	SLP?<CR>

<b>COMMAND</b>	<b>PARAMETER</b>	function	example
MS	<b>MOVIE</b>	Select SURROUND mode	<b>MSMOVIE&lt;CR&gt;</b>
	<b>MUSIC</b>		<b>MSMUSIC&lt;CR&gt;</b>
	<b>GAME</b>		<b>MSGAME&lt;CR&gt;</b>
	<b>DIRECT</b>		<b>MSDIRECT&lt;CR&gt;</b>
	<b>PURE DIRECT</b>		<b>MSPURE DIRECT&lt;CR&gt;</b>
	<b>STEREO</b>		<b>MSSTEREO&lt;CR&gt;</b>
	<b>STANDARD</b>		<b>MSSTANDARD&lt;CR&gt;</b>
	<b>DOLBY DIGITAL</b>		<b>MSDOLBY DIGITAL&lt;CR&gt;</b>
	<b>DTS SUROUND</b>	----5/7CH STEREO mode	<b>MSDTS SURROUND&lt;CR&gt;</b>
	<b>MCH STEREO</b>		<b>MSMCH STEREO&lt;CR&gt;</b>
	<b>ROCK ARENA</b>		<b>MSROCK ARENA&lt;CR&gt;</b>
	<b>JAZZ CLUB</b>		<b>MSJAZZ CLUB&lt;CR&gt;</b>
	<b>MONO MOVIE</b>		<b>MSMONO MOVIE&lt;CR&gt;</b>
	<b>MATRIX</b>		<b>MSMATRIX&lt;CR&gt;</b>
	<b>VIDEO GAME</b>		<b>MSVIDEO GAME&lt;CR&gt;</b>
	<b>VIRTUAL</b>		<b>MSVIRTUAL&lt;CR&gt;</b>
	<b>?</b>	Return MS Status	<b>MS?&lt;CR&gt;</b>
QUICK1	<b>QUICK1</b>	QUICK SELECT 1-5 MODE SELECT	<b>MSQUICK1&lt;CR&gt;</b>
	<b>QUICK2</b>		<b>MSQUICK2&lt;CR&gt;</b>
	<b>QUICK3</b>		<b>MSQUICK3&lt;CR&gt;</b>
	<b>QUICK4</b>		<b>MSQUICK4&lt;CR&gt;</b>
	<b>QUICK5</b>		<b>MSQUICK5&lt;CR&gt;</b>
QUICK1 MEMORY	<b>QUICK1 MEMORY</b>	QUICK SELECT 1-5 MODE MEMORY	<b>MSQUICK1 MEMORY&lt;CR&gt;</b>
	<b>QUICK2 MEMORY</b>		<b>MSQUICK2 MEMORY&lt;CR&gt;</b>
	<b>QUICK3 MEMORY</b>		<b>MSQUICK3 MEMORY&lt;CR&gt;</b>
	<b>QUICK4 MEMORY</b>		<b>MSQUICK4 MEMORY&lt;CR&gt;</b>
	<b>QUICK5 MEMORY</b>		<b>MSQUICK5 MEMORY&lt;CR&gt;</b>
<b>QUICK ?</b>		Return MSQUICK Status	<b>MSQUICK ?&lt;CR&gt;</b>

<b>COMMAND</b>	<b>PARAMETER</b>	function	example
VS	AUDIO AMP	Set HDMI AUDIO Output to AMP	VSAUDIO AMP<CR>
	AUDIO TV	Set HDMI AUDIO Output to TV	VSAUDIO TV<CR>
	AUDIO ?	Return VSAUDIO Status	VSAUDIO ?<CR>
	VPMAUTO	Set Video Processing Mode to AUTO	VSVPMAUTO<CR>
	VPMGAME	Set Video Processing Mode to GAME	VSVPGMGAME<CR>
	VPMMOVI	Set Video Processing Mode to MOVIE	VSVPMMOVI<CR>
	VPM ?	Return VSVPDM Status	VSVPDM ?<CR>

COMMAND	PARAMETER	function	example
PS	TONE CTRL OFF	PARAMETER setting TONE CONTROL ON/OFF Return PSTONE CONTROL Status  SURROUND BACK SP MODE set	PSTONE CTRL OFF<CR>
	TONE CTRL ON		PSTONE CTRL OFF<CR>
	TONE CTRL ?		PSTONE CTRL ?<CR>
	SB:MTRX ON		PSSB:MTRX ON<CR>
	SB:PL2x CINEMA		PSSB:PL2X CINEMA<CR>
	SB:PL2x MUSIC		PSSB:PL2X MUSIC<CR>
	SB:ON		PSSB:ON<CR>
	SB:OFF		PSSB:OFF<CR>
	SB: ?		PSSB: ?<CR>
	CINEMA EQ.ON		PSCINEMA EQ.ON<CR>
	CINEMA EQ.OFF		PSCINEMA EQ.OFF<CR>
	CINEMA EQ. ?		PSCINEMA EQ. ?<CR>
	MODE: MUSIC	CINEMA / MUSIC / GAME / PL mode change (This parameter can change DOLBY PL2,PL2x,NEO:6 mode.) ---SB=ON : PL2x mode / SB=OFF : PL2 mode --- GAME can change DOLBY PL2 & PL2x mode --- PL can change ONLY DOLBY PL2 mode	PSMODE: MUSIC<CR>
	MODE: CINEMA		PSMODE: CINEMA<CR>
	MODE: GAME		PSMODE: GAME<CR>
	MODE: PRO LOGIC		PSMODE: PRO LOGIC<CR>
	MODE: ?		PSMODE: ?<CR>
	FH:ON	FRONT HEIGHT ON/OFF	PSFH:ON<CR>
	FH:OFF		PSFH:OFF<CR>
	FH: ?		PSFH: ?<CR>
	PHG LOW	PL z HEIGHT GAIN direct change	PSPHG LOW<CR>
	PHG MID		PSPHG MID<CR>
	PHG HI		PSPHG HI<CR>
	PHG ?		PSPHG ?<CR>

COMMAND	PARAMETER	function	example
PS	MULTEQ:AUDYSSEY	MultEQ XT/MultEQ mode direct change	PSMULTEQ: AUDYSSEY<CR>
	MULTEQ:BYP.LR		PSMULTEQ: BYP.LR<CR>
	MULTEQ:FLAT		PSMULTEQ: FLAT<CR>
	MULTEQ:MANUAL		PSMULTEQ: MANUAL<CR>
	MULTEQ:OFF		PSMULTEQ: OFF<CR>
	MULTEQ: ?	Return PSMULTEQ: Status	PSMULTEQ: ?<CR>
	DYNEQ ON	Dynamic EQ = ON	PSDYNEQ ON<CR>
	DYNEQ OFF		PSDYNEQ OFF<CR>
	DYNEQ ?	Return PSDYNEQ Status	PSDYNEQ ?<CR>
	REFLEV 0	Reference Level Offset=0dB	PSREFLEV 0<CR>
	REFLEV 5	Reference Level Offset=5dB	PSREFLEV 5<CR>
	REFLEV 10	Reference Level Offset=10dB	PSREFLEV 10<CR>
	REFLEV 15	Reference Level Offset=15dB	PSREFLEV 15<CR>
	REFREV ?	Return PSREFLEV Status	PSREFLEV ?<CR>
	DYNVOL NGT	Dynamic Volume = Midnight	PSDYNVOL NGT<CR>
	DYNVOL EVE		PSDYNVOL EVE<CR>
	DYNVOL DAY		PSDYNVOL DAY<CR>
	DYNVOL ?	Return PSDYNVOL Status	PSDYNVOL ?<CR>

COMMAND	PARAMETER	function	example
PS	BAS UP	BASS UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 50=0dB ---AVR-2112CI/AVR-1912 can be operated from -6 to +6(44 to 56)	PSBAS UP<CR>
	BAS DOWN		PSBAS DOWN<CR>
	BAS **		PSBAS 50<CR>
	BAS ?		PSBAS ?<CR>
	TRE UP		PSTRE UP<CR>
	TRE DOWN		PSTRE DOWN<CR>
	TRE **		PSTRE 50<CR>
	TRE ?		PSTRE ?<CR>
	DRC AUTO		PSDRC AUTO<CR>
	DRC LOW		PSDRC LOW<CR>
	DRC MID		PSDRC MID<CR>
	DRC HI		PSDRC HI<CR>
	DRC OFF		PSDRC OFF<CR>
	DRC ?		PSDRC ?<CR>
	DCO OFF		PSDCO OFF<CR>
	DCO LOW		PSDCO LOW<CR>
	DCO MID		PSDCO MID<CR>
	DCO HIGH		PSDCO HIGH<CR>
	DCO ?		PSDCO ?<CR>
	LFE UP		PSLFE UP<CR>
	LFE DOWN		PSLFE DOWN<CR>
	LFE **		PSLFE 10<CR>
	LFE ?		PSLFE ? <CR>
	EFF UP		PSEFF UP<CR>
	EFF DOWN		PSEFF DOWN<CR>
	EFF **		PSEFF 10<CR>
	EFF ?		PSEFF ?<CR>
	DEL UP	DELAY UP/DOWN , direct change to ***dB ***:000 to 999 by ASCII , 000=0ms, 300=300ms ---AVR-2112CI/AVR-1912 can be operated from 0 to 300	PSDEL UP<CR>
	DEL DOWN		PSDEL DOWN<CR>
	DEL ***		PSDEL ***<CR>
	DEL ?		PSDEL ?<CR>

PS **COMMAND** : "\*" parameter uses two or three ASCII characters. (see page6 J) section)

COMMAND	PARAMETER	function	example
PS	AFD ON	AFDM ON/OFF	PSAFD ON<CR>
	AFD OFF		PSAFD OFF<CR>
	AFD ?	Return PSAFD Status	PSAFD ?<CR>
	PAN ON	PANORAMA ON/OFF	PSPAN ON<CR>
	PAN OFF		PSPAN OFF<CR>
	PAN ?	Return PSPAN Status	PSPAN ?<CR>
	DIM UP	DIMENSION UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 00=0, ---AVR-2112CI/AVR-1912 can be operated from 0 to 6	PSDIM UP<CR>
	DIM DOWN		PSDIM DOWN<CR>
	DIM **		PSDIM **<CR>
	DIM ?	Return PSDIM Status	PSDIM ?<CR>
	CEN UP	CENTER WIDTH UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 00=0 ---AVR-2112CI/AVR-1912 can be operated from 0 to 7	PSCEN UP<CR>
	CEN DOWN		PSCEN DOWN<CR>
	CEN **		PSCEN 07<CR>
	CEN ?	Return PSCEN Status	PSCEN ?<CR>
	CEI UP	CENTER IMAGE UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 00=0.0 ---AVR-2112CI/AVR-1912 can be operated from 0.0 to 1.0	PSCEI UP<CR>
	CEI DOWN		PSCEI DOWN<CR>
	CEI **		PSCEI 10<CR>
	CEI?	Return PSCEI Status	OSCEI ?<CR>
	SWR ON	SW ON/OFF	PSSWR ON<CR>
	SWR OFF		PSSWR OFF<CR>
	SWR ?	Return PSSWR Status	PSSWR ?<CR>
	RSZ S	ROOM SIZE direct change	PSRSZ S<CR>
	RSZ MS		PSRSZ MS<CR>
	RSZ M		PSRSZ M<CR>
	RSZ ML		PSRSZ ML<CR>
	RSZ L		PSRSZ L<CR>
	RSZ ?	Return PSRSZ Status	PSRSZ ?<CR>
	DELAY UP	AUDIO DELAY UP/DOWN , direct change to ***dB ***:000 to 999 by ASCII , 000=0ms, 200=200ms ---AVR-2112CI/AVR-1912 can be operated from 0 to 200	PSDELAY UP<CR>
	DELAY DOWN		PSDELAY DOWN<CR>
	DELAY ***		PSDELAY 200<CR>
	DELAY ?	Return PSDELAY Status	PSDELAY ?<CR>

PS **COMMAND** : "\*" parameter uses two or three ASCII characters. (see page6 J) section)

<b>COMMAND</b>	<b>PARAMETER</b>	function	example
PS	RSTR OFF	AUDIO RESTORER direct change	PSRSTR OFF<CR>
	RSTR MODE1		PSRSTR MODE1<CR>
	RSTR MODE2		PSRSTR MODE2<CR>
	RSTR MODE3		PSRSTR MODE3<CR>
	RSTR ?	Return PSRSTR Status	PSRSTR ?<CR>
	FRONT SPA	FRONT SPEAKER direct change	PSFRONT SPA<CR>
	FRONT SPB		PSFRONT SPB<CR>
	FRONT SPA+B		PSFRONT A+B<CR>
	FRONT?	Return PSFRONT Status	PSFRONT?<CR>

<b>COMMAND</b>	<b>PARAMETER</b>	function	example
Z2	CD   USB/IPOD	ZONE2 mode set , and select source ---The name of PARAMETER is the same as that of the time of SI COMMAND.	Z2CD<CR>   Z2USB/IPOD<CR>
	USB	Select ZONE2 source NET/USB and USB Start Playback	Z2USB<CR>
	IPD	Select ZONE2 source NET/USB and iPod Direct Start Playback	Z2IPD<CR>
	IRP	Select ZONE2 source NET/USB and Internet Radio Start Playback	Z2IRP<CR>
	FVP	Select ZONE2 source NET/USB and Favorites Start Playback	Z2FVP<CR>
	SOURCE	ZONE2 mode cancel	Z2SOURCE<CR>
	UP	ZONE2 VOLUME UP/DOWN , direct change to **dB **:00 to 99 by ASCII , 80=0dB, 99=---(MIN) 00=-80dB	Z2UP<CR>
	DOWN		Z2DOWN<CR>
	**		Z280<CR>
	ON	ZONE2 ON/OFF change	Z2ON<CR>
	OFF		Z2OFF<CR>
	?	Return Z2 Status	Z2?<CR>
Z2MU	ON	ZONE2 OUTPUT MUTE ON/OFF change	Z2MUON<CR>
	OFF		Z2MUFF<CR>
	?	Return Z2MU Status	Z2MU?<CR>
Z2CV	FL UP	ZONE2 CHANNEL VOLUME UP/DOWN , direct change to **dB ---FRONT Lch **:38 to 62 by ASCII , 50=0dB	Z2CVFL UP<CR>
	FL DOWN		Z2CVFL DOWN<CR>
	FL **		Z2CVFL 50<CR>
	FR UP	ZONE2 CHANNEL VOLUME UP/DOWN , direct change to **dB ---FRONT Rch **:38 to 62 by ASCII , 50=0dB	Z2CVFR UP<CR>
	FR DOWN		Z2CVFR DOWN<CR>
	FR **		Z2CVFR 50<CR>
	?	Return Z2CV Status	Z2CV?<CR>

Z2、Z2CV **COMMAND** : "\*" parameter uses two ASCII characters. (see page6 J) section)

**NOTE:** Z2 COMMAND is valid when "ZONE2" is selected with "Amp Assign" at AVR-1912.

Z2\*\*(*volume*) , Z2CV COMMAND is valid when "ZONE2" is selected with "Amp Assign" at AVR-2112CI.

COMMAND	PARAMETER	function	example
Z2	QUICK1	ZONE2 QUICK SELECT 1-5 MODE SELECT	Z2QUICK1<CR>
	QUICK2		Z2QUICK2<CR>
	QUICK3		Z2QUICK3<CR>
	QUICK4		Z2QUICK4<CR>
	QUICK5		Z2QUICK5<CR>
	QUICK1 MEMORY	ZONE2 QUICK SELECT 1-5 MODE MEMORY	Z2QUICK1 MEMORY<CR>
	QUICK2 MEMORY		Z2QUICK2 MEMORY<CR>
	QUICK3 MEMORY		Z2QUICK3 MEMORY<CR>
	QUICK4 MEMORY		Z2QUICK4 MEMORY<CR>
	QUICK5 MEMORY		Z2QUICK5 MEMORY<CR>
	QUICK ?	Return Z2QUICK Status	Z2QUICK ?<CR>

*NOTE: Z2 COMMAND is valid when "ZONE2" is selected with "Amp Assign" at AVR-1912.*

## ANALOG TUNER Control

COMMAND	PARAMETER	function	example
TF	ANUP	TUNER Frequency UP/DOWN	TFANUP<CR>
	ANDOWN		TFANDOWN<CR>
	AN***** (6 digits)	--- ****.* kHz at AM band (>050000 is AM.) ****.* MHz at FM band (<050000 is FM.)	TFAN105000<CR> (1050.00kHz at AM)
	AN?	Return TF Status	TFAN?<CR>
TP	ANUP	TUNER PRESET CH UP/DOWN , direct change to No.**	TPANUP<CR>
	ANDOWN		TPANDOWN<CR>
	AN** (PRESET No.)		TPANA1<CR> (PRESET No. "A1")
	AN?	Return TP Status	TPAN?<CR>
	ANMEM	TUNER PRESET MEMORY	TPANMEM<CR>
	ANMEM**	TUNER PRESET MEMORY, Preset stored at No.** ** : A1-G8	TPANMEM**<CR>
TM	ANAM	TUNER BAND , MODE Select ---Band set to AM	TMANAM<CR>
	ANFM		TMANFM<CR>
	AN?	Return TM Status	TMAN?<CR>
	ANAUTO	---Tuning mode set to AUTO mode	TMANAUTO<CR>
	ANMANUAL	---Tuning mode set to MANUAL mode	TMANMANUAL<CR>

TF, TP, TM **COMMAND** : '\*' parameters can NOT operate when INPUT source isn't TUNER.

## Network Audio/USB /iPod DIRECT Extended Control

COMMAND	PARAMETER	function	example
NS	90	"Cursor Up" Control	NS90<CR>
	91	"Cursor Down" Control	NS91<CR>
	92	"Cursor Left" Control	NS92<CR>
	93	"Cursor Right" Control	NS93<CR>
	94	"Enter (Play/Pause)" Control	NS94<CR>
	9A	"Play" Control(iRadio/mServer/USB) "Play/Pause" Control(iPod Direct)	NS9A<CR>
	9B	"Pause" Control "Play/Pause" Control(iPod Direct)	NS9B<CR>
	9C	"Stop" Control	NS9C<CR>
	9D	"Skip Plus" Control	NS9D<CR>
	9E	"Skip Minus" Control	NS9E<CR>
	9H	"Repeat One" (USB/iPod DIRECT/mServer/Rhapsody/Napster)	NS9H<CR>
	9I	"Repeat All" (USB/iPod DIRECT/mServer/Rhapsody/Napster)	NS9I<CR>
	9J	"Repeat Off" (USB/iPod DIRECT/mServer/Rhapsody/Napster)	NS9J<CR>
	9K	"Random On/Repeat ALL" (USB/mServer/Rhapsody/Napster) "Shuffle Songs" Control (iPod Direct Only)	NS9K<CR>
	9M	"Random Off" (USB/mServer/Rhapsody/Napster) "Shuffle Off" Control (iPod Direct Only)	NS9M<CR>
	9W	Toggle Switch "Browse Mode/Remote Mode Control (iPod Direct Only)	NS9W<CR>
	9X	"Page Next" Control	NS9X<CR>
	9Y	"Page Previous" Control	NS9Y<CR>
	PT	Enter/Exit PARTY MODE	NSPT<CR>
NSA		Return Onscreen Display Information List (ASCII CODE Character)	NSA<CR> (Return NSA0-NSA8,Refer to Page 38 )
		Request Onscreen Display Information List (UTF-8 CODE Character)	NSE<CR> (Return NSE0-NSE8,Refer to Page 39 )
NSD	*	"Direct Character Search"( iRadio/mServer/USB/Rhapsody only)	NSD0<CR> (*:0-9,A-Z)

COMMAND	PARAMETER	function	example
NS	P1	Preset1-3 Call	NSP1<CR>
	P2		NSP2<CR>
	P3		NSP3<CR>
	P1 MEM	Preset 1-3 Memory	NSP1 MEM<CR>
	P2 MEM		NSP2 MEM<CR>
	P3 MEM		NSP3 MEM<CR>
	P	Return Preset 1-3 status (UTF-8)	NSP<CR>
	B** (PRESET No.)	Preset Call ** : 00-55 (00:A1/55:G8)	NSB00<CR>
	C** (PRESET No.)	Preset Memory, Preset stored at No.** ** : 00-55 (00:A1/55:G8)	NSC00<CR>
	H	Return Preset Channel A1-G8 status (UTF-8)	NSH<CR>

## iPod dock Extended Control

iPod Dock which AVR-2112CI/AVR-1912 can connect with is ASD-1R/11R.

COMMAND	PARAMETER	function	example
IP	90	"Cursor Up" Control	IP90<CR>
	91	"Cursor Down" Control	IP91<CR>
	92	"Cursor Left" Control	IP92<CR>
	93	"Cursor Right" Control	IP93<CR>
	94	"Enter (Play/Pause)" Control	IP94<CR>
	9A	"Play/Pause" Control	IP9A<CR>
	9C	"Stop" Control	IP9C<CR>
	9D	"Skip Plus" Control	IP9D<CR>
	9E	"Skip Minus" Control	IP9E<CR>
	9F	"Manual Search Plus" Control	IP9F<CR>
	9G	"Manual Search Minus" Control	IP9G<CR>
	9H	"Repeat One" Control	IP9H<CR>
	9I	"Repeat All" Control	IP9I<CR>
	9J	"Repeat Off" Control	IP9J<CR>
	9K	"Shuffle Songs" Control	IP9K<CR>
	9L	"Shuffle Album" Control	IP9L<CR>
	9M	"Shuffle Off" Control	IP9M<CR>
	9N	"MENU" Control	IP9N<CR>
	9P	Switch the "Browse Mode" Control	IP9P<CR>
	9Q	Switch the "Remote Mode" Control	IP9Q<CR>
	9X	"Page Next" Control	IP9X<CR>
	9Y	"Page Previous" Control	IP9Y<CR>
IPA		Return Onscreen Display Information List (ASCII CODE Character)	IPA<CR> (Return IPA0-IPA9 ,Refer to Page 41-42 )
IPE		Request Onscreen Display Information List(iPOD) (UTF-8 CODE Character)	IPE<CR> (Return IPE0-IPE9 ,Refer to Page 43-44 )

## **Cursor/Enter/Menu(Setup)**

<b>COMMAND</b>	<b>PARAMETER</b>	<b>function</b>	<b>example</b>
MN	CUP	"Cursor Up" Control	MNCUP<CR>
	CDN	"Cursor Down" Control	MNCDN<CR>
	CLT	"Cursor Left" Control	MNCLT<CR>
	CRT	"Cursor Right" Control	MNCRT<CR>
	ENT	"Enter" Control	MNENT<CR>
	RTN	"RETURN" Control	MNRDN<CR>
	MEN ON	"GUI Menu ON" Control	MNMEN ON<CR>
	MEN OFF	"GUI Menu OFF" Control	MNMEN OFF<CR>
	SRC ON	"GUI Source Select Menu ON" Control	MNSRC ON<CR>
	SRC OFF	"GUI Source Select Menu OFF" Control	MNSRC OFF<CR>

## Remote Lock/Panel Lock

<b>COMMAND</b>	<b>PARAMETER</b>	<b>function</b>	<b>example</b>
SY	REMOTE LOCK ON	REMOTE CONTROL LOCK ON/OFF	SYREMOTE LOCK ON<CR>
	REMOTE LOCK OFF		SYREMOTE LOCK OFF<CR>
	PANEL LOCK ON	PANEL BUTTON (Except MASTER VOL.) CONTROL LOCK ON	SYPANEL LOCK ON<CR>
	PANEL+V LOCK ON	PANEL BUTTON & MASTER VOL. CONTROL LOCK ON	SYPANEL+V LOCK ON<CR>
	PANEL LOCK OFF	PANEL BUTTUM & MASTER VOL. CONTROL LOCK OFF	SYPANEL LOCK OFF<CR>

## UPGRADE ID Display

<b>COMMAND</b>	<b>PARAMETER</b>	<b>function</b>	<b>example</b>
UG	IDN	ID Number for UPGRADE is displayed on FL Display	UGIDN<CR>

## EVENT(or RESPONSE) and PARAMETER list

EVENT	PARAMETER	function	example
PW	ON	POWER ON/STANDBY change	PWON<CR>
	STANDBY		PWSTANDBY<CR>
MV	**	MASTER VOLUME change , **:00 to 99 by ASCII 98 = 18dB(MAX) 80 = 0dB 00 = -80dB <b>995 = -80.5dB</b> 99 = ---(MIN)	MV80<CR>
CV	FL **	CHANNEL VOLUME change , **:00,38 to 62 by ASCII 62 = +12dB(MAX) 50 = 0dB 38 = -12dB(MIN) 00 = OFF (define ONLY SWch in DIRECT mode.)  (at SBch 2SP) (at SBch 2SP) (at SBch 1SP)	CVFL 50<CR>
	FR **		CVFR 50<CR>
	C **		CVC 50<CR>
	SW **		CVSW 50<CR>
	SL **		CVSL 50<CR>
	SR **		CVSR 50<CR>
	SBL **		CVSBL 50<CR>
	SBR **		CVSBR 50<CR>
	SB **		CVSB 50<CR>
	FHL **		CVFHL 50<CR>
	FHR **		CVFHR 50<CR>
MU	ON	OUTPUT MUTE ON/OFF change	MUON<CR>
	OFF		MUOFF<CR>
SI	CD	INPUT source change	SICD<CR>
	TUNER		SITUNER<CR>
	DVD		SIDVD<CR>
	BD		SIBD<CR>
	TV		SITV<CR>
	SAT/CBL		SISAT/CBL<CR>
	GAME		SIGAME<CR>

The **PARAMETER** of MV, CV **EVENT** : Uses two or three ASCII characters. (see page6 J) section)

<b>EVENT</b>	<b>PARAMETER</b>	function	example
SI	<b>GAME2</b>	(North America model Only) (North America & Europe model Only) (North America model Only) (Europe model Only)	<b>SIGAME2&lt;CR&gt;</b>
	V.AUX		SIV.AUX<CR>
	DOCK		SIDOCK<CR>
	IPOD		SIIPOD<CR>
	NET/USB		SINET/USB
	RHAPSODY		SIRHAPSODY<CR>
	NAPSTER		SINAPSTER<CR>
	PANDORA		SIPANDORA<CR>
	LASTFM		SILASTFM<CR>
	FLICKR		SIFLICKR<CR>
	FAVORITES		SIFAVORITES<CR>
	IRADIO		SIIRADIO<CR>
	SERVER		SISERVER<CR>
	USB DIRECT		SIUSB DIRECT<CR>
	IPOD DIRECT		SIIPOD DIRECT<CR>
	USB		SIUSB<CR>
	IPD		SIIPD<CR>
	<b>IRP</b>		<b>SIIRP&lt;CR&gt;</b>
	<b>FVP</b>		<b>SIFVP&lt;CR&gt;</b>
ZM	ON	MAIN ZONE ON/OFF change	ZMON<CR>
	OFF		ZMOFF<CR>

EVENT	PARAMETER	function	example
SD	AUTO	INPUT mode change ARC playing No Input	SDAUTO<CR>
	HDMI		SDHDMI<CR>
	DIGITAL		SDDIGITAL<CR>
	ANALOG		SDANALOG<CR>
	ARC		SDARC<CR>
	NO		SDNO<CR>
DC	AUTO	DIGITAL INPUT mode change	DCAUTO<CR>
	PCM		DCPCM<CR>
	DTS		DCDTS<CR>
SV	DVD	VIDEO SELECT mode source change	SVDVD<CR>
	BD		SVBD<CR>
	TV		SVTV<CR>
	SAT/CBL		SVSAT/CBL<CR>
	GAME		SVGAME<CR>
	<b>GAME2</b>		<b>SVGAME2&lt;CR&gt;</b>
	V.AUX		SVV.AUX<CR>
	DOCK		SVDOCKCR>
	SOURCE		SVSOURCE<CR>
SLP	OFF	MAIN ZONE SLEEP TIMER setting change	SLPOFF<CR>
	***		SLP120<CR>

EVENT	PARAMETER	function	example
MS	DIRECT	SURROUND mode change	MSDIRECT<CR>
	PURE DIRECT		MSPURE DIRECT<CR>
	STEREO		MSSTEREO<CR>
	MULTI CH IN		MSMULTI CH IN<CR>
	M CH IN+PL2X C		MSM CH IN+PL2X C<CR>
	M CH IN+PL2X M		MSM CH IN+PL2X M<CR>
	M CH IN+PL2Z H		MSM CH IN+PL2Z H<CR>
	M CH IN +DOLBY EX		MSM CH IN+DOLBY EX<CR>
	MULTI CH IN 7.1		MSMULTI CH IN 7.1<CR>
	DOLBY PRO LOGIC		MSDOLBY PRO LOGIC<CR>
	DOLBY PL2 C		MSDOLBY PL2 C<CR>
	DOLBY PL2 M		MSDOLBY PL2 M<CR>
	DOLBY PL2 G		MSDOLBY PL2 G<CR>
	DOLBY PL2X C		MSDOLBY PL2X C<CR>
	DOLBY PL2X M		MSDOLBY PL2X M<CR>
	DOLBY PL2X G		MSDOLBY PL2X G<CR>
	DOLBY PL2Z H		MSDOLBY PL2Z H<CR>
	DOLBY DIGITAL		MSDOLBY DIGITAL<CR>
	DOLBY D EX		MSDOLBY D EX<CR>
	DOLBY D +PL2X C		MSDOLBY D+PL2X C<CR>
	DOLBY D +PL2X M		MSDOLBY D+PL2X M<CR>
	DOLBY D +PL2Z H		MSDOLBY D+PL2Z H<CR>
	DTS NEO:6 C		MSDTS NEO:6 C<CR>
	DTS NEO:6 M		MSDTS NEO:6 M<CR>
	DTS SURROUND		MSDTS SURROUND<CR>
	DTS ES DSCRT6.1		MSDTS ES DSCRT6.1<CR>
	DTS ES MTRX6.1		MSDTS ES MTRX6.1<CR>
	DTS+PL2X C		MSDTS+PL2X C<CR>
	DTS+PL2X M		MSDTS+PL2X M<CR>
	DTS+PL2Z H		MSDTS+PL2Z H<CR>

EVENT	PARAMETER	function	example
	DTS+NEO:6		MSDTS+NEO:6<CR>
	DTS96/24		MSDTS96/24<CR>
	DTS96 ES MTRX		MSDTS96 ES MTRX<CR>
	MCH STEREO		MSMCH STEREO<CR>
	ROCK ARENA		MSROCK ARENA<CR>
	JAZZ CLUB		MSJAZZ CLUB<CR>
	MONO MOVIE		MSMONO MOVIE<CR>
	MATRIX		MSMATRIX<CR>
	VIDEO GAME		MSVIDEO GAME<CR>
	VIRTUAL		MSVIRTUAL<CR>
	DOLBY D+		MSDOLBY D+<CR>
	DOLBY D+ +EX		MSDOLBY D+ +EX<CR>
	DOLBY D+ +PL2X C		MSDOLBY D+ +PL2X C<CR>
	DOLBY D+ +PL2X M		MSDOLBY D+ +PL2X M<CR>
	DOLBY D+ +PL2Z H		MSDOLBY D+ +PL2Z H<CR>
	DOLBY TRUEHD		MSDOLBY HD<CR>
	DOLBY HD		MSDOLBY HD<CR>
	DOLBY HD+EX		MSDOLBY HD+EX<CR>
	DOLBY HD+PL2X C		MSDOLBY HD+PL2X C<CR>
	DOLBY HD+PL2X M		MSDOLBY HD+PL2X M<CR>
	DOLBY HD+PL2Z H		MSDOLBY HD+PL2Z H<CR>
	DTS HD		MSDTS HD<CR>
	DTS HD MSTR		MSDTS HD MSTR<CR>
	DTS HD+NEO:6		MSDTS HD+NEO:6<CR>
	DTS HD+PL2X C		MSDTS HD+PL2X C<CR>
	DTS HD+PL2X M		MSDTS HD+PL2X M<CR>
	DTS HD+PL2Z H		MSDTS HD+PL2Z H<CR>
	DTS ES 8CH DSCRT		MSDTS ES 8CH DSCRT<CR>
	DTS EXPRESS		MSDTS EXPRESS<CR>
	MPEG2 AAC	(JAPAN model Only)	MSMPEG2 AAC<CR>
	AAC+DOLBY EX	(JAPAN model Only)	MSAAC+DOLBY EX<CR>
	AAC+PL2X C	(JAPAN model Only)	MSAAC+PL2X C<CR>
	AAC+PL2X M	(JAPAN model Only)	MSAAC+PL2X M<CR>
	AAC+PL2Z H	(JAPAN model Only)	MSAAC+PL2Z H<CR>

<b>EVENT</b>	<b>PARAMETER</b>	function	example
MS	QUICK1	QUICK SELECT mode change	MSQUICK1<CR>
	QUICK2		MSQUICK2<CR>
	QUICK3		MSQUICK3<CR>
	QUICK4		MSQUICK4<CR>
	QUICK5		MSQUICK5<CR>
	QUICK0	--QUICK 1(or 2, 3, 4, 5) Change QUICK SELECT OFF	MSQUICK0<CR>

<b>EVENT</b>	<b>PARAMETER</b>	function	example
VS	AUDIO AMP	HDMI AUDIO Output setting change	VSAUDIO AMP<CR>
	AUDIO TV		VSAUDIO TV<CR>
	VPMAUTO	Video Mode setting change	VSVPMAUTO<CR>
	VPMGAME		VSVPGMGAME<CR>
	VPMMOVI		VSVPMMOVI<CR>

EVENT	PARAMETER	function	example
PS	TONE CTRL OFF	TONE CONTROL ON/OFF change	PSTONE CTRL OFF<CR>
	TONE CTRL ON		PSTONE CTRL OFF<CR>
	SB:MTRX ON	SURROUND BACK MODE change	PSSB:MTRX ON<CR>
	SB:PL2X CINEMA		PSSB:PL2X CINEMA<CR>
	SB:PL2X MUSIC		PSSB:PL2X MUSIC<CR>
	SB:ON		PSSB:ON<CR>
	SB:OFF		PSSB:OFF<CR>
	SB:ESMTRX		PSSB:ESMTRX<CR>
	CINEMA EQ.ON	CINEMA EQ. ON/OFF change	PSCINEMA EQ.ON<CR>
	CINEMA EQ.OFF		PSCINEMA EQ.OFF<CR>
	MODE:CINEMA	CINEMA / MUSIC / GAME / PL /HEIGHT mode change	PSMODE:CINEMA<CR>
	MODE:MUSIC		PSMODE:MUSIC<CR>
	MODE:GAME		PSMODE:GAME<CR>
	MODE:PRO LOGIC		PSMODE:PRO LOGIC<CR>
	MODE:HEIGHT		PSMODE:HEIGHT<CR>
	FH:ON	FRONT HEIGHT Output change	PSFH:ON<CR>
	FH:OFF		PSFH:OFF<CR>
	PHG LOW	PL z HEIGHT GAIN direct change	PSPHG LOW<CR>
	PHG MID		PSPHG MID<CR>
	PHG HI		PSPHG HI<CR>
	MULTEQ:AUDYSSEY	MultEQ XT mode change	PSMULTEQ:AUDYSSEY<CR>
	MULTEQ:BYP.LR		PSMULTEQ:BYP.LR<CR>
	MULTEQ:FLAT		PSMULTEQ:FLAT<CR>
	MULTEQ:MANUAL		PSMULTEQ:MANUAL<CR>
	MULTEQ:OFF		PSMULTEQ:OFF<CR>
	DYNEQ ON	DYNAMIC EQ change	PSDYNEQ ON<CR>
	DYNEQ OFF		PSDYNEQ OFF<CR>

<b>EVENT</b>	<b>PARAMETER</b>	function	example
PS	REFLEV 0	Reference Level Offset change	PSREFLEV 0<CR>
	REFLEV 5		PSREFLEV 5<CR>
	REFLEV 10		PSREFLEV 10<CR>
	REFLEV 15		PSREFLEV 15<CR>
	DYNVOL NGT	DYNAMIC VOLUME change	PSDYNVOL NGT<CR>
	DYNVOL EVE		PSDYNVOL EVE<CR>
	DYNVOL DAY		PSDYNVOL DAY<CR>
	BAS **	BASS change	PSBAS 50<CR>
	TRE **	TREBLE change	PSTRE 50<CR>
	DRC AUTO	DRC change	PSDRC AUTO<CR>
	DRC LOW		PSDRC LOW<CR>
	DRC MID		PSDRC MID<CR>
	DRC HI		PSDRC HI<CR>
	DRC OFF		PSDRC OFF<CR>
	DCO OFF	D.COMP change	PSDCO OFF<CR>
	DCO LOW		PSDCO LOW<CR>
	DCO MID		PSDCO MID<CR>
	DCO HIGH		PSDCO HIGH<CR>
	LFE **	LFE change	PSLFE 10<CR>
	EFF **	EFFECT LEVEL change	PSEFF 10<CR>
	DEL ***	DELAY change	PSDEL 100<CR>

<b>EVENT</b>	<b>PARAMETER</b>	function	example
PS	AFD ON	AFDM change	PSAFD ON<CR>
	AFD OFF		PSAFD OFF<CR>
	PAN ON	PANORAMA change	PSPAN ON<CR>
	PAN OFF		PSPAN OFF<CR>
	DIM **	DIMMENSION change	PSDIM 06<CR>
	CEN **	CENTER WIDTH change	PSCEN 07<CR>
	CEI **	CENTER IMAGE change	PSCEI 10<CR>
	SWR ON	SW ON/OFF change	PSSWR ON<CR>
	SWR OFF		PSSWR OFF<CR>
	RSZ S	ROOM SIZE change	PSRSZ S<CR>
	RSZ MS		PSRSZ MS<CR>
	RSZ M		PSRSZ M<CR>
	RSZ ML		PSRSZ ML<CR>
	RSZ L		PSRSZ L<CR>
	DELAY ***	AUDIO DELAY change	PSDELAY 200<CR>
	RSTR OFF	AUDIO RESTORER change	PSRSTR OFF<CR>
	RSTR MODE1		PSRSTR MODE1<CR>
	RSTR MODE2		PSRSTR MODE2<CR>
	RSTR MODE3		PSRSTR MODE3<CR>
	FRONT SPA	FRONT SPEAKER direct change	PSFRONT SPA<CR>
	FRONT SPB		PSFRONT SPB<CR>
	FRONT SPA+B		PSFRONT A+B<CR>

EVENT	PARAMETER	function	example
Z2	CD   USB DIRECT IPOD DIRECT	ZONE2 source change ---The name of PARAMETER is the same as that of the time of SI COMMAND.	Z2CD<CR>   Z2USB DIRECT<CR> Z2IPOD DIRECT<CR>
	SOURCE	ZONE2 mode cancel	Z2SOURCE<CR>
	QUICK1	ZONE2 QUICK SELECT mode change	Z2QUICK1<CR>
	QUICK2		Z2QUICK2<CR>
	QUICK3		Z2QUICK3<CR>
	QUICK4		Z2QUICK4<CR>
	QUICK5		Z2QUICK5<CR>
	QUICK0	---Z2 QUICK SELECT 1(or 2, 3, 4, 5) Change QUICK SELCT OFF	Z2QUICK0<CR>
	**	ZONE2 VOLUME change , **:00 to 99 by ASCII 98 = 18dB(MAX) 80 = 0dB 10 = -70dB 00 = -80dB 99 = ---(MIN)	Z280<CR>
	ON OFF	ZONE2 ON/OFF change	Z2ON<CR>
	ON OFF		Z2OFF<CR>
Z2MU	ON	ZONE2 OUTPUT MUTE ON/OFF change	Z2MUON<CR>
Z2CV	FL **		Z2CVFL 50<CR>
	FR **	**:38 to 62 by ASCII , 50=0dB **:38 to 62 by ASCII , 50=0dB	Z2CVFR 50<CR>

The **PARAMETER** of Z2 **EVENT** : Uses two ASCII characters. (see page4 J) section)

## ANALOG TUNER Control

EVENT	PARAMETER	function	example
TF	AN***** (6 digits)	TUNER Frequency change  --- ****.* kHz at AM band *****.* MHz at FM band	TFAN105000<CR>  (1050.00kHz at AM)
TP	AN**(PRESET No.)	TUNER PRESET change to No.**	TPANA1<CR> (PRESET No."A1")
	ANOFF	Change Preset Channel select OFF	TPANOFF<CR>
	ANMEM**	<b>TUNER PRESET MEMORY</b>	<b>TPANMEMA1&lt;CR&gt;</b>
TM	ANAM	TUNER BAND , MODE change  ---Band set to AM	TMANAM<CR>
	ANFM	---Band set to FM	TMANFM<CR>
	ANAUTO	---Tuning mode set to AUTO mode	TMANAUTO<CR>
	ANMANUAL	---Tuning mode set to MANUAL mode	TMANMANUAL<CR>

## Network Audio/USB /iPod DIRECT Extended Control

EVENT	PARAMETER	function	example
NSA		Onscreen Display Information is Answered By the NSA Command.	
	0	Display Line1 Information	NSA0*****_?????<CR>
	1	Display Line3 Information	NSA1 *****_?????<CR>
	2	Display Line4 Information	NSA2 *****_?????<CR>
	3	Display Line5 Information	NSA3 *****_?????<CR>
	4	Display Line6 Information	NSA4 *****_?????<CR>
	5	Display Line7 Information	NSA5 *****_?????<CR>
	6	Display Line8 Information	NSA6 *****_?????<CR>
	7	Display Line9 Information	NSA7*****_?????<CR>
	8	Display Line10 Information	NSA8*****_????? *:Character Length MAX96byte _:Null ?:Exclusion(The character after Null should be disregarded) :Cursor&Playable Information Data(1Byte) Bit1:Playable Music Bit2:Directory Bit4:CURSOR SELECT=1 Bit7:Picture Bit3,5,6,8:Don't Care
			NSA0Now Playing USB_????<CR> NSA1 Come Away With Me_???<CR> NSA2 Norah Jones_?????????<CR> NSA3 _?????????????????????<CR> NSA4 _?????????????????????<CR> NSA5 00:11 100%_??????<CR> NSA6 _?????????????????????<CR> NSA7_?????????????????????<CR> NSA8_?????????????????????<CR>

EVENT	PARAMETER	function	example
NSE		Onscreen Display Information(mServer/iRadio) is Answered By the NSE Command.	
	0	Display Line1 Information	NSE0*****_?????<CR>
	1	Display Line3 Information	NSE1 *****_?????<CR>
	2	Display Line4 Information	NSE2 *****_?????<CR>
	3	Display Line5 Information	NSE3 *****_?????<CR>
	4	Display Line6 Information	NSE4 *****_?????<CR>
	5	Display Line7 Information	NSE5 *****_?????<CR>
	6	Display Line8 Information	NSE6 *****_?????<CR>
	7	Display Line9 Information	NSE7*****_?????<CR>
	8	Display Line10 Information	NSE8*****_????? *:UTF-8 CODE Character(MAX96byte) :_Null ?: Don't Care (The character after Null should be disregarded) :Cursor&Playable Information Data(1Byte) Bit1:Playable Music =1 Bit2:Directory Bit4:CURSOR SELECT=1 Bit7:Picture Bit3,5,6,8:Don't Care *****_?????:96byte Fixed
			<example> NSE0Now Playing USB_????<CR> NSE1 Come Away With Me_???<CR> NSE2 Norah Jones_?????????<CR> NSE3 _?????????????????????????<CR> NSE4 _?????????????????????????<CR> NSE5 00:11 100%_??????<CR> NSE6 _?????????????????????????<CR> NSE7_?????????????????????????<CR> NSE8_?????????????????????????<CR>

COMMAND	PARAMETER	function	example
NS	P1	Preset1-3 Call	NSP1<CR>
	P2		NSP2<CR>
	P3		NSP3<CR>
	P1 MEM	Preset 1-3 Memory	NSP1 MEM<CR>
	P2 MEM		NSP2 MEM<CR>
	P3 MEM		NSP3 MEM<CR>
	P	Return Preset 1-3 status (UTF-8)	NSP01******(20 digits)<CR> NSP02******(20 digits)<CR> NSP03******(20 digits)<CR> ***:Station name or Title name
	B** (PRESET No.)	Preset Call ** :00-55 (00:A1/55:G8)	NSB00<CR>
	C** (PRESET No.)	Preset Memory, Preset stored at No.** ** :00-55 (00:A1/55:G8)	NSC00<CR>
	H	Return Preset Channel A1-G8 status (UTF-8) (00:A1-55:G8)	NSH00******(20 digits)<CR> NSH01******(20 digits)<CR>   NSH54******(20 digits)<CR> NSH55******(20 digits)<CR>

## iPod Extended Control

iPod Dock which AVR-2112CI/AVR-1912 can connect with is ASD-1R/11R.

EVENT	PARAMETER	function	example
IPA		Onscreen Display Information is Answered By the IPA Command.	
	0	Display Line1 Information	IPA0*****_??<CR>
	1	Display Line3 Information	IPA1 *****_??<CR>
	2	Display Line4 Information	IPA2 *****_??<CR>
	3	Display Line5 Information	IPA3 *****_??<CR>
	4	Display Line6 Information	IPA4 *****_??<CR>
	5	Display Line7 Information	IPA5 *****_??<CR>
	6	Display Line8 Information	IPA6 *****_??<CR>
	7	Display Line9 Information	IPA7 *****_??<CR>
	8	Display Line10 Information	IPA8#*****_??<CR>
	9	Display Line11 Information	IPA9*****_??<CR>  *:Character Length MAX96byte _:Null ?:Exclusion(The character after Null should be disregarded) :Cursor Information Data(1Byte) Bit1:Playable Music/Video=1 Bit2:Directory=1 Bit4:CURSOR SELECT=1 Bit3,5,6,7,8:Don't Care #:Bit1-8:Don't Care

<b>EVENT</b>	<b>PARAMETER</b>	function	example
IPA			<pre> &lt;example1&gt; IPA0Artist?????????????????&lt;CR&gt; IPA1 Ana Caram_?????????????&lt;CR&gt; IPA2 Badi Assad_?????????????&lt;CR&gt; IPA3 Christy Baron_?????????&lt;CR&gt; IPA4 Marta Gomez_?????????&lt;CR&gt; IPA5 Rebecca Pidgeon_??????&lt;CR&gt; IPA6 Sara K_?????????????????&lt;CR&gt; IPA7 Valerie Joyce_?????????&lt;CR&gt; IPA8# SFL Songs RPT All_???&lt;CR&gt; IPA9 [ 2/ 6]_?????????&lt;CR&gt;  &lt;example2&gt; IPA0Now Playing iPod_??????&lt;CR&gt; IPA1 A HARD DAY'S NIGHT._??&lt;CR&gt; IPA2 /The Beatles_?????????&lt;CR&gt; IPA3 _?????????????????????????&lt;CR&gt; IPA4 A HARD DAY'S NIGHT_??&lt;CR&gt; IPA5 00:04_?????????????????&lt;CR&gt; IPA6 _?????????????????????????&lt;CR&gt; IPA7 _?????????????????????????&lt;CR&gt; IPA8# SFL Songs RPT All_???&lt;CR&gt; IPA9?????????????????????????&lt;CR&gt; </pre>

EVENT	PARAMETER	function	example
IPE		Onscreen Display Information(iPod) is Answered By the IPA Command.	
	0	Display Line1 Information	IPE0*****_??<CR>
	1	Display Line3 Information	IPE1 *****_??<CR>
	2	Display Line4 Information	IPE2 *****_??<CR>
	3	Display Line5 Information	IPE3 *****_??<CR>
	4	Display Line6 Information	IPE4 *****_??<CR>
	5	Display Line7 Information	IPE5 *****_??<CR>
	6	Display Line8 Information	IPE6 *****_??<CR>
	7	Display Line9 Information	IPE7 *****_??<CR>
	8	Display Line10 Information	IPE8#*****_??<CR>
	9	Display Line11 Information	IPE9*****_??<CR>  *:UTF-8 CODE Character(MAX96byte) _:Null ?:Exclusion(The character after Null should be disregarded) :Cursor Information Data(1Byte) Bit1:Playable Music/Video=1 Bit2:Directory=1 Bit3:Don't Care Bit4:CURSOR SELECT=1 Bit3,5,6,7,8:Don't Care #: Bit1-8:Don't Care

EVENT	PARAMETER	function	example
IPE			<pre> &lt;example1&gt; IPE0Artist????????????????????&lt;CR&gt; IPE1 Ana Caram_?????????????&lt;CR&gt; IPE2 Badi Assad_?????????????&lt;CR&gt; IPE3 Christy Baron_?????????&lt;CR&gt; IPE4 Marta Gomez_?????????&lt;CR&gt; IPE5 Rebecca Pidgeon_??????&lt;CR&gt; IPE6 Sara K_?????????????????&lt;CR&gt; IPE7 Valerie Joyce_?????????&lt;CR&gt; IPE8# SFL Songs RPT All_??&lt;CR&gt; IPE9 [ 2/ 6]_?????????????&lt;CR&gt;  &lt;example2&gt; IPE0Now Playing iPod_??????&lt;CR&gt; IPE1 A HARD DAY'S NIGHT._??&lt;CR&gt; IPE2 /The Beatles_?????????&lt;CR&gt; IPE3 _?????????????????????????&lt;CR&gt; IPE4 A HARD DAY'S NIGHT_??&lt;CR&gt; IPE5 00:04_?????????????????&lt;CR&gt; IPE6 _?????????????????????????&lt;CR&gt; IPE7 _?????????????????????????&lt;CR&gt; IPE8# SFL Songs RPT All_??&lt;CR&gt; IPE9 _?????????????????????????&lt;CR&gt; </pre>

## Remote Lock/Panel Lock

EVENT	PARAMETER	function	example
SY	REMOTE LOCK ON	REMOTE CONTROL LOCK ON/OFF	SYREMOTE LOCK ON<CR>
	REMOTE LOCK OFF		SYREMOTE LOCK OFF<CR>
	PANEL LOCK ON	PANEL BUTTON(Except MASTER VOL.) CONTROL LOCK ON	SYPANEL LOCK ON<CR>
	PANEL+V LOCK ON	PANEL BUTTON & MASTER VOL. CONTROL LOCK ON	SYPANEL+V LOCK ON<CR>
	PANEL LOCK OFF	PANEL BUTTUM & MASTER VOL. CONTROL LOCK OFF	SYPANEL LOCK OFF<CR>

## UPGRADE ID Display

COMMAND	PARAMETER	function	example
UG	IDN *****:*****	ID Number for UPGRADE is displayed on FL Display *****:12-digit ID Number	UGIDN *****:*****<CR>
	IDN NG	Can't get ID number from DPMS	UGIDN NG<CR>

## Extension COMMAND

- The RC code can be sent from Serial protocol commands

### Protocol specification

**Command structure:** COMMAND + RC FORMAT + RC DATA + CR (0x0D)

COMMAND : ASCII CODE of 2 characters

Ex.            RC : RC CODE

RC FORMAT : ASCII CODE of 3 characters

Ex.            KSK : KASEIKYO FORMAT

SHP : SHARP FORMAT

RC DATA : ASCII CODE of 7 characters

For details of the RC CODE , please refer to the IR remote control code list.

#### KASEIKYO FORMAT

##### REMOTE ID SET : 1

No.	K4-1 : MAIN ZONE																				Key Name		
	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45		
RCKSK0410002	1	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1	0
RCKSK0410003						1	1	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1	0
RCKSK0410006						0	1	1	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0
RCKSK0410007						1	1	1	0	0	0	0	0	0	0	0	1	0	0	0	1	1	0

#### SHARP FORMAT

No.	Data (C6~C11)	Key Name	No.	Data (C6~C11)	Key Name
RCSHP0230032	000001	ENTER	RCSHP0230048	000011	MUTING
RCSHP0230033	100001	POWER ON	RCSHP0230049	100011	MASTER VOLUME UP
RCSHP0230034	010001	POWER OFF	RCSHP0230050	010011	MASTER VOLUME DOWN
RCSHP0230035	110001	DVD	RCSHP0230051	110011	SL LEVEL UP
RCSHP0230036	001001	STANDARD(DOLBY/DTS SURR.)	RCSHP0230052	001011	SL LEVEL DOWN
RCSHP0230037	101001	SURROUND DOWN	RCSHP0230053	101011	CENTERED (EVEI) UP

**The example of a command**

\* <CR> is the meaning of 0x0D.

RCKSK0410002<CR> : All Power ON by using KASEIKYO FORMAT

RCSHP0230033<CR> : All Power ON by using SHARP FORMAT